


288F Fiber Optic Splice Closures

Single Circuit Max: 48 Trays, 48x12 Fibers


Features

- Modular capacity up to 288 fibers
- May be used for cut, uncut and taut sheath applications.
- May be used for all fiber optic cable.
- Sheath retention & central strength member fasten system included.
- Closure construction and lightweight plastic provides strength and resistance to chemical and U.V attack
- Installation and reentry with a minimum of tools
- All hardware is included
- Protection class: IP68
- RoHS compliance

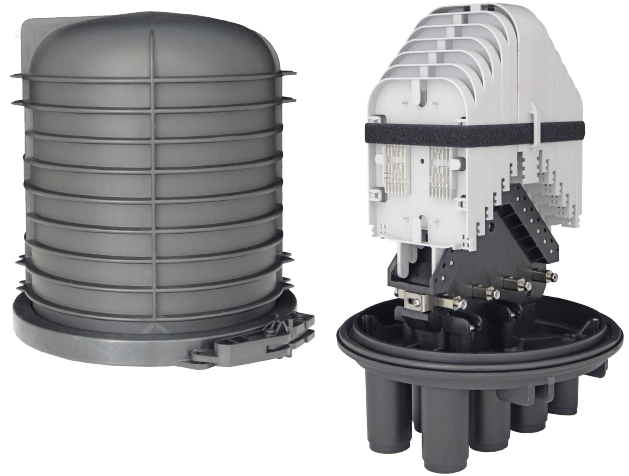

Application

Underground, Aerial, Vault, Pole Mounting and Wall Mountable

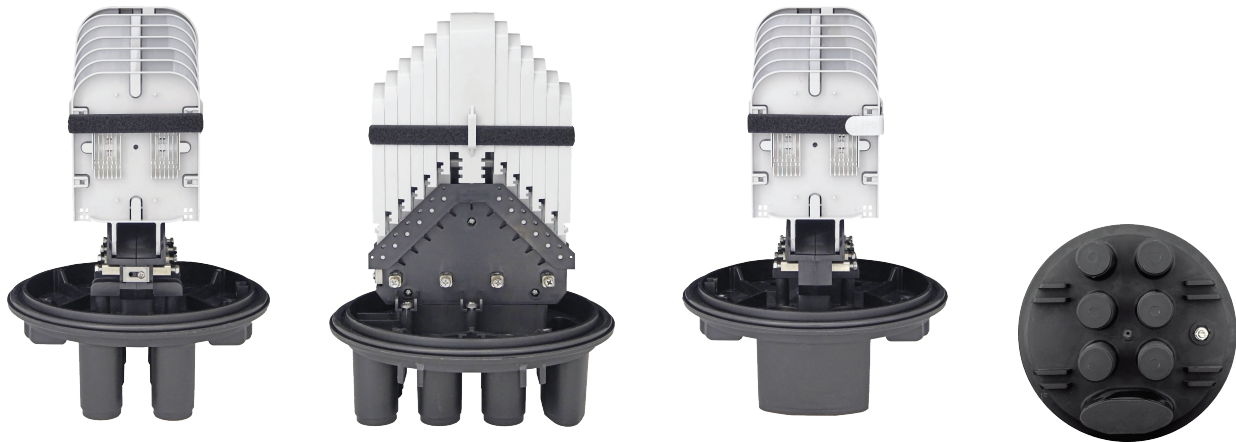

Specifications

Model No.	YT01057 SSC-361250-6P-288-12T/12T-T059A 576x265m, 576 Fibers Capacity, 48 Trays, 6 Port, Enclosure , w/o Mounting Kits
Model No.	YT01058 SSC-361250-6P-144-6T/12T-T059A 576x265m, 288 Fibers Capacity, 24 Trays, 6 Port, Enclosure , w/o Mounting Kits
Spliced Fiber Storage Capacity	288 splices (12x24)
Size Height x Diameter	361mm x 250mm (w/o clamp), 361mm x 300mm (w/ clamp)
Cable Ports	1 oval port (30mm), 6 round ports (30mm)
Mounting Kits	Wall Mounting Kit - 2 Pole Mounting Kit - 2
See Other Document	