

## 8 Fibers Multi-Mode Fan-out | 1.8 mm

### Connector Specifications

LC Connector Compliance	IEC 61754-20, TIA 604-10-A, RoHS
SC Connector Compliance	IEC 61754-4, TIA 604-3, RoHS
One Side Connector Count	8 Connectors
Alignment Technology	Full ceramic ferrule (Zirconia ZrO <sub>2</sub> )
Operating Temperature	-40°C to +85°C
Flammability	UL94 V-0
Durability	< 0.1 dB typical change for > 500 matings

### Cable Specifications

- 8 core distribution fiber optic cable
- CPR: Dca, s2, d0, a1
- Cable Diameter: 3.0 mm / Sub-unit Diameter: 1.8 mm
- Length tolerance is ± 50 mm
- Max. Tensile Strength: 200N
- Min. Bending Radius 20 mm
- Cable Color: OM3: Aqua; OM4: Violet


### Optical Performance

Insertion Loss IEC 61300-3-4 Method B	Multi-Mode ≤ 0.30 dB
Return Loss IEC61300-3-6 Method B	Multi-Mode ≥ 35 dB



### End-face Control Parameters

Geometry Inspection	IEC 61755-3-1
Visual Inspection	IEC 61300-3-35

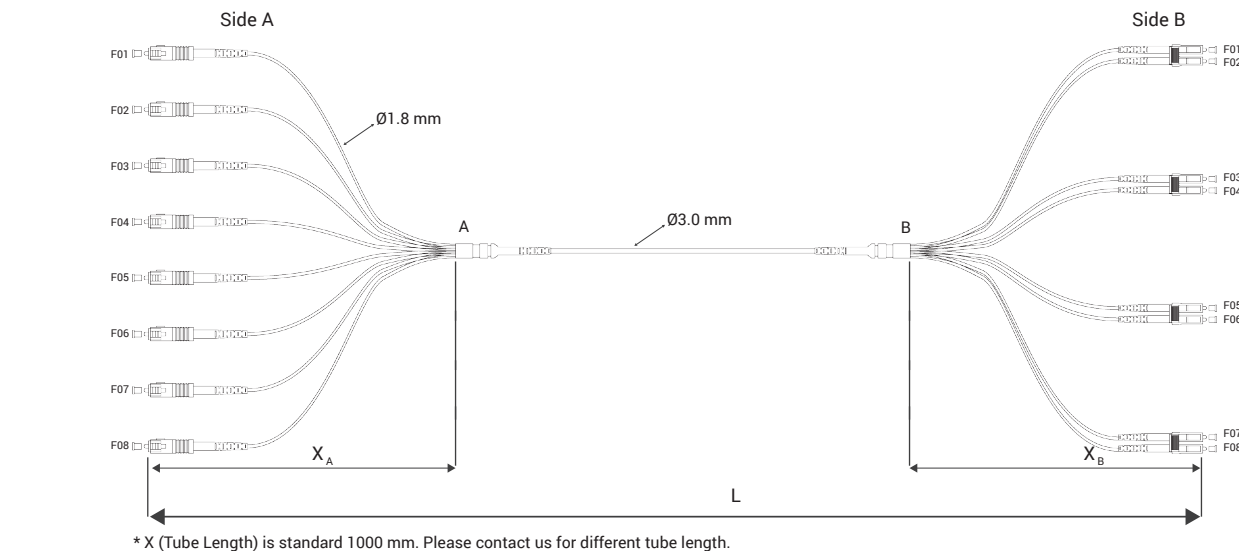

Sample Coding **I - PC - 08 - FC - 318 - M4 - 08SCS - 04LCD - 005M**

Type	Type	Fiber Count	Cable Type	Diameter	Fiber Type	1. Connector	2. Connector	Length
Indoor: I	Patch Cord: PC	8 Fibers: 08	Fan-out: FC	3.0/1.8 mm: 318	MM G.651 OM3: M3 MM G.651 OM4: M4	SC-UPC: 08SCS LC-UPC: 04LCD	SC-UPC: 08SCS LC-UPC: 04LCD	... M