

8 Fibers Multi-Mode Fan-out | 0.9 mm

Connector Specifications

LC Connector Compliance	IEC 61754-20, TIA 604-10-A, RoHS
SC Connector Compliance	IEC 61754-4, TIA 604-3, RoHS
One Side Connector Count	8 Connectors
Alignment Technology	Full ceramic ferrule (Zirconia ZrO ₂)
Operating Temperature	-40°C to +85°C
Flammability	UL94 V-0
Durability	< 0.1 dB typical change for > 500 matings

Cable Specifications

- 8 core distribution fiber optic cable
- CPR: Dca, s2, d0, a1
- Cable Diameter: 3.0 mm / Sub-unit Diameter: 0.9 mm
- Length tolerance is ± 50 mm
- Max. Tensile Strength: 200N
- Min. Bending Radius 20 mm
- Cable Color: OM3: Aqua; OM4: Violet


Optical Performance

Insertion Loss IEC 61300-3-4 Method B	Multi-Mode ≤ 0.30dB
Return Loss IEC61300-3-6 Method B	Multi-Mode ≥ 35dB



End-face Control Parameters

Geometry Inspection	IEC 61755-3-1
Visual Inspection	IEC 61300-3-35

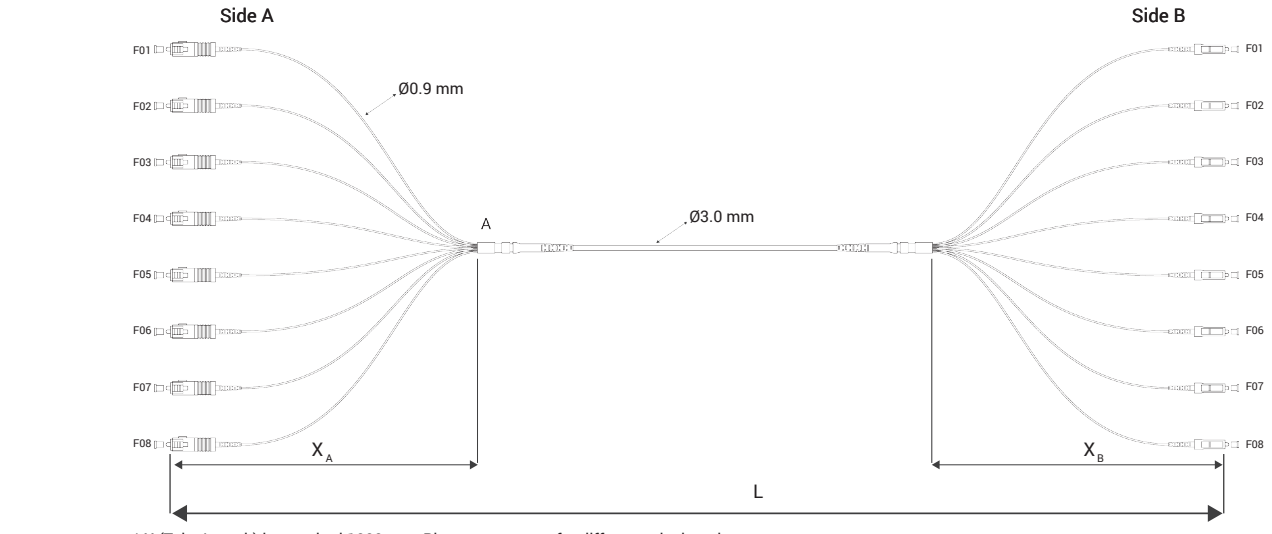

Sample Coding **I - PC - 08 - FC - 309 - M4 - 08SCS - 08LCS - 005M**

Type	Type	Fiber Count	Cable Type	Diameter	Fiber Type	1. Connector	2. Connector	Length
Indoor: I	Patch Cord: PC	8 Fibers: 08	Fan-out: FC	3.0/0.9 mm: 309	MM G.651 OM3: M3 MM G.651 OM4: M4	SC-UPC: 08SCS LC-UPC: 08LCS	SC-UPC: 08SCS LC-UPC: 08LCS	... M